




C55

WITH 2 REDUCTION GEARS WHICH INCREASE THE CUT POWER WITH A LOW ENERGY COSTS.

GEARS AND PINION GEARS IN TEMPERED STEEL, WET IN OIL. STRONG FRAME, WITH ELECTRIC LEVER AND MECHANICAL LEVER CONTROL.

BLADES INTERCHANGEABLE WITH 4 CUT CORNERS.

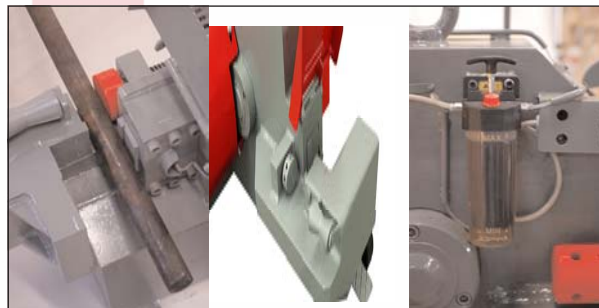

CUTTING EQUIPMENTS:

- CHECKING BLOCK WITH ADJUSTABLE SCREWS

Extra accessory:

- AUTOMATIC LUBRIFICATION PUMP

C55	
DIMENSIONS	120X80XH106
WEIGHT	Kg 774
MOTOR	Hp 7,5 - 230/400/50 Hz -2 Poles
NUMBER OF BLOWS FOR MINUTE	40
CUTTING CAPACITY	
RESISTENCE 45 Kg/mm	1 BAR Ø 55
RESISTENCE 65 Kg/mm	1 BAR Ø 44
RESISTENCE 80 Kg/mm	1 BAR Ø 36