




P55

DIMENSIONSs	95 X 90 X 140		
WEIGHT	Kg 775		
OIL CAPACITY	Lt. 5		
BENDING CAPACITY			
	1 bar	2 bars	3 bars
R 45 KG/mm2	55 mm	44 mm	36 mm
R 65 KG/mm2	48 mm	40 mm	32 mm
R 80 KG/mm2	44 mm	36 mm	28 mm

EXTRA PANEL CONTROL TO STORAGE UP TO 5 BENDS ON SEQUENCE

EURO 350,00

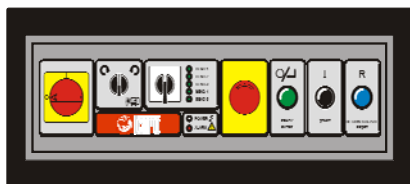

P55

BUILT WITH A HEAVY CARRYING STRUCTURE.

THE AXIAL GEARS IN FORGED AND PROCESSED STEEL AND ALL ROTARY ORGANS ARE ENCLOSED IN AN OIL BATH IN THE REDUCTION GEARBOX IN A STRONG ROLLED SECTION. AN AMBIVALENT WORKING BENCH ALLOWS ANY TYPE OF BENDING WITHOUT SHIFTING THE BAR; BESIDES, IT IS POSSIBLE TO MODIFY THE TYPE OF BEND THROUGH SHIFTING THE PEG IN THE HOLES ON THE WORKING BENCH. THE CONTROLS ALLOWS STOPPING AND RECYCLING AT ANY TIME DURING THE PROCESS. LOW VOLTAGE ELECTRICAL CONTROL EQUIPMENT (24 VOLT). P55 IS WELL PROVIDED :

- DOUBLE BENDING WITH ROTATING PLATE 400mm.
- BUSHES FROM 70mm. TO 130mm
- MOTOR HP7,5
- 1 CHECKING BLOCK
- 1 STIRRUP BENDING PIN
- 1 SQUARE PIN
- 3 BUSH HOLDING PINS+1 PEDAL+1 SET OF BUSHES
- BRACKET BENDER GAUGE, SPIRAL COLLER AND DUAL BENDER ARE AVAILABLE ON REQUEST

powered by

